

Dell EMC PowerEdge R550

Technical Guide

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

| | |
|---|-----------|
| Chapter 1: System overview | 5 |
| Key workloads..... | 5 |
| New technologies..... | 5 |
| Chapter 2: System features and generational comparison | 7 |
| Chapter 3: Chassis views and features | 9 |
| Chassis views..... | 9 |
| Front view of the system..... | 9 |
| Rear view of the system..... | 10 |
| Inside the system..... | 10 |
| Quick Resource Locator..... | 11 |
| Chapter 4: Processor | 12 |
| Processor features | 12 |
| Supported processors..... | 12 |
| Chapter 5: Memory subsystem | 13 |
| Supported memory..... | 13 |
| Memory speed..... | 14 |
| Chapter 6: Storage | 15 |
| Storage controllers..... | 15 |
| Supported drives..... | 15 |
| External storage..... | 16 |
| Chapter 7: Networking | 17 |
| Overview..... | 17 |
| OCP 3.0 support..... | 17 |
| Supported OCP cards..... | 17 |
| OCP NIC 3.0 vs. rack Network Daughter Card comparisons..... | 18 |
| OCP form factors..... | 18 |
| Chapter 8: Expansion cards | 20 |
| Expansion card installation guidelines..... | 20 |
| Chapter 9: Power, thermal, and acoustics | 24 |
| Power..... | 24 |
| Thermal..... | 25 |
| Acoustics..... | 25 |
| Acoustical performance..... | 25 |
| Chapter 10: Rack, rails, and cable management | 27 |

| | |
|--|-----------|
| Rails information..... | 27 |
| Sliding rails..... | 27 |
| Static rails..... | 29 |
| Cable Management Arm..... | 29 |
| Strain Relief Bar | 30 |
| Chapter 11: Supported Operating Systems..... | 31 |
| Chapter 12: Dell EMC OpenManage systems management..... | 32 |
| Server and Chassis Managers..... | 33 |
| Dell EMC consoles..... | 33 |
| Automation Enablers..... | 33 |
| Integration with third-party consoles..... | 33 |
| Connections for third-party consoles..... | 33 |
| Dell EMC Update Utilities..... | 33 |
| Dell resources..... | 33 |
| Chapter 13: Dell Technologies Services | 35 |
| Dell EMC ProDeploy Enterprise Suite | 35 |
| Dell EMC ProDeploy Plus..... | 36 |
| Dell EMC ProDeploy..... | 36 |
| Basic Deployment..... | 36 |
| Dell EMC Server Configuration Services..... | 36 |
| Dell EMC Residency Services..... | 36 |
| Dell EMC Remote Consulting Services..... | 36 |
| Dell EMC Data Migration Service..... | 36 |
| Dell EMC ProSupport Enterprise Suite..... | 36 |
| Dell EMC ProSupport Plus for Enterprise..... | 37 |
| Dell EMC ProSupport for Enterprise..... | 37 |
| Dell EMC ProSupport One for Data Center..... | 38 |
| ProSupport for HPC..... | 38 |
| Support Technologies..... | 39 |
| Dell Technologies Education Services..... | 40 |
| Dell Technologies Consulting Services..... | 40 |
| Dell EMC Managed Services..... | 40 |
| Chapter 14: Appendix A: Additional specifications..... | 41 |
| Chassis dimensions..... | 41 |
| Chassis weight..... | 42 |
| Video specifications..... | 42 |
| USB ports..... | 42 |
| Internal USB..... | 43 |
| PSU rating..... | 43 |
| Environmental specifications..... | 44 |
| Thermal restrictions..... | 46 |
| Chapter 15: Appendix B. Standards compliance..... | 48 |
| Chapter 16: Appendix C Additional resources..... | 49 |

System overview

The Dell™ PowerEdge™ R550 is Dell's latest 2-socket, 2U rack server designed to run complex workloads using highly scalable memory, I/O, and network options. The system features the 3rd Generation Intel® Xeon Scalable Processor, up to 16 DIMMs, PCI Express® (PCIe) 4.0 enabled expansion slots, and a choice of network interface technologies to cover NIC.

The PowerEdge R550 is a general-purpose platform capable of handling demanding workloads and applications, such as data warehouses, e-commerce, databases, and high-performance computing (HPC).

Topics:

- [Key workloads](#)
- [New technologies](#)

Key workloads

The target workloads for the PowerEdge R550 include light duty virtualization, small IT infrastructure and small business specific workloads.

New technologies

Table 1. New technologies

| Technology | Detailed Description |
|--|---|
| 3rd Generation Intel Xeon Scalable Processor | Core count: up to 24 core processor |
| | UPI speed: up to 3 x UPIs/socket at 10.4 GT/s or 11.2 GT/s |
| | Maximum number of PCIe lanes: Integrated 64 PCIe 4.0 lanes @ 16 GT/s PCIe Gen4 |
| | Maximum TDP: 185 W |
| 2933 MT/s DDR4 Memory | Maximum 8 DIMMs per processor |
| | Supports DDR4 ECC RDIMM, with ECC up to 2933 MT/s |
| Flex IO | LOM board, 2 x 1 GB with BCM5720 LAN controller |
| | Rear IO with 1 GB dedicated management network port, USB 3.0 x 1, USB 2.0 x 1, and VGA port |
| | Serial port option |
| | OCP Mezz 3.0 (supported by x16 PCIe lanes) |
| Dedicated PERC | Front storage module PERC with front PERC 10.5 and PERC 11 |
| Power Supplies | 60 mm dimension is the new PSU form factor on 15G design |
| | 600 W Platinum 100–240 VAC/ 240 VDC |
| | 700 W Titanium 200–240 VAC/240 VDC |
| | 800 W Platinum 100–240 VAC/ 240 VDC |
| | 1100 W Titanium 100–240 VAC/ 240 VDC |

Table 1. New technologies (continued)

| Technology | Detailed Description |
|-------------------|-----------------------------|
| | 1100 W DC/-48 -(-60) V |

System features and generational comparison

The following table shows the comparison between the PowerEdge R550 and PowerEdge R540:

Table 2. Feature comparison

| Feature | PowerEdge R550 | PowerEdge R540 |
|------------------------------|--|---|
| Processor | Maximum two 3rd Generation Intel® Xeon® Scalable processors with maximum 24 cores per processor. | Maximum two 2nd Generation Intel® Xeon® Scalable processors with maximum 20 cores per processor. |
| Processor Interconnect | Intel Ultra Path Interconnect (UPI) | Intel Ultra Path Interconnect (UPI) |
| Memory | 16 DDR4 DIMM slots, Supports RDIMM 1 TB, up to 3200 MT/s | 16 DDR4 DIMM slots, Supports registered ECC DDR4 DIMMs only, Up to 2666 MT/s |
| Storage Drives | Front bays: <ul style="list-style-type: none"> Up to 16 x 2.5-inch SAS/SATA (HDD/SSD) Up to 8 x 2.5-inch SAS/SATA(HDD/SSD) Up to 8 x 3.5-inch SAS/SATA (HDD/SSD) | Front bays: <ul style="list-style-type: none"> Up to 12 x 3.5-inch SAS/SATA HDD max 168 TB DVD-ROM, DVD+RW (optional) Rear bays: <ul style="list-style-type: none"> Up to 2 x 3.5-inch SAS/SATA HDD max 28 TB |
| Storage Controllers | Internal Controllers: PERC H345, PERC H355, PERC H745, PERC H755, HBA355i External Controllers: PERC H840, HBA355e Internal Boot: Internal Dual SD Module, Boot Optimized Storage Subsystem (BOSS-S2): HWRAID 2 x M.2 SSDs, USB Software RAID: S150 | Internal Controllers: PERC H330, H730P, H740P, HBA330 External Controllers: H840, 12 Gbps SAS HBA Software RAID: S140 Internal Boot: Boot Optimized Storage Subsystem (BOSS): HWRAID 2 x M.2 SSDs 240GB, 480 GB, Internal Dual SD Module |
| PCIe Slots | 3 x Gen 4 PCIe slots 1 x Gen 3 PCIe slot | Non-rear storage configuration <ul style="list-style-type: none"> 1 x full height/full length 1 x half height/half length (2U Right riser) slots 3 x half height/half length slots Rear storage config <ul style="list-style-type: none"> 1 x half height/half length (1U left riser) 1 x half height/half length or 1full height/half length (1U right riser) |
| Embedded NIC (LOM) | 2 x 1GbE LOM | 2 x 1GbE LOM |
| Networking options (OCP 3.0) | OCP 3.0 | 2 x 1GbE LOM+ (optional) LOM Riser 2 x 1GbE, or 2 x 10GE SFP+, or 2 x 10GE BaseT |
| USB Ports | Front Ports <ul style="list-style-type: none"> 1 x iDRAC Direct (Micro-AB USB) port 1 x USB 2.0 1 x VGA Rear Ports | Front Ports <ul style="list-style-type: none"> 1 x Dedicated iDRAC direct USB 1 x USB 2.0 1 x Video Rear Ports |

Table 2. Feature comparison (continued)

| Feature | PowerEdge R550 | PowerEdge R540 |
|-------------------|---|---|
| | <ul style="list-style-type: none"> ● 1 x USB 2.0 ● 1 x Dedicated iDRAC ethernet port ● 1 x Serial (optional) ● 1 x USB 3.0 ● 1 x VGA Internal Ports <ul style="list-style-type: none"> ● 1 x USB 3.0 (optional) | <ul style="list-style-type: none"> ● 1 x Dedicated iDRAC network port ● 1 x Serial ● 2 x USB 3.0 ● 1 x Video |
| Rack Height | 2U | 2U |
| Power Supplies | <ul style="list-style-type: none"> ● 600 W Platinum 100–240 VAC/ 240 VDC ● 700 W Titanium 200–240 VAC/240 VDC ● 800 W Platinum 100–240 VAC/ 240 VDC ● 1100 W DC/-48–(-60) V ● 1100 W Titanium 100–240 VAC/ 240 VDC | <ul style="list-style-type: none"> ● 495 W Platinum ● 750 W Platinum ● 750 W 240HVDC Platinum ● 1100 W Platinum ● 1100 W 380 V HDC Platinum ● Hot plug power supplies with full redundancy option |
| System Management | <ul style="list-style-type: none"> ● iDRAC9 ● iDRAC Direct ● iDRAC Service Module ● Quick Sync 2 wireless module | <ul style="list-style-type: none"> ● iDRAC9 ● iDRAC RESTful API with Redfish ● iDRAC Direct ● Quick Sync 2 BLE/wireless module |
| Availability | <ul style="list-style-type: none"> ● Hot-plug Drives ● Hot-plug Redundant Power Supplies ● Internal Dual SD Module (IDSMD) | <ul style="list-style-type: none"> ● Hot-plug Drives ● Hot-plug Redundant Power Supplies ● Internal Dual SD Module (IDSMD) |

Chassis views and features

Topics:

- Chassis views

Chassis views

Front view of the system



Figure 1. Front view of 8 x 3.5-inch drive system

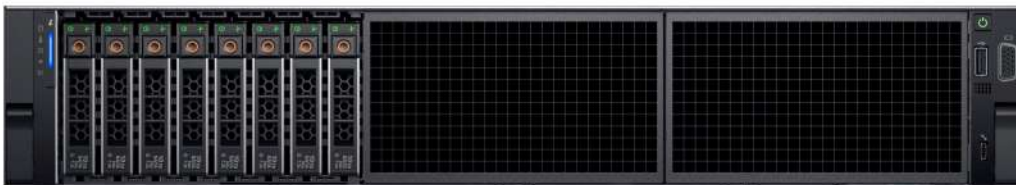


Figure 2. Front view of 8 x 2.5-inch SAS/SATA drive system



Figure 3. Front view of 16 x 2.5-inch SAS/SATA drive system

Rear view of the system

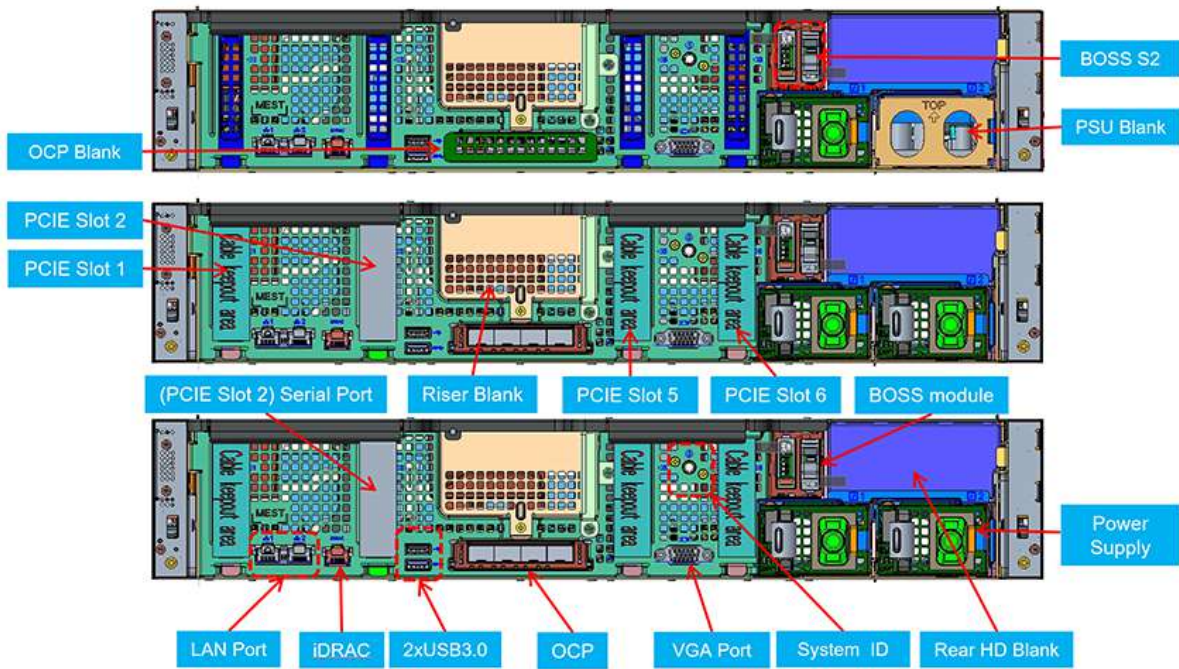


Figure 4. Rear view of the system

Inside the system

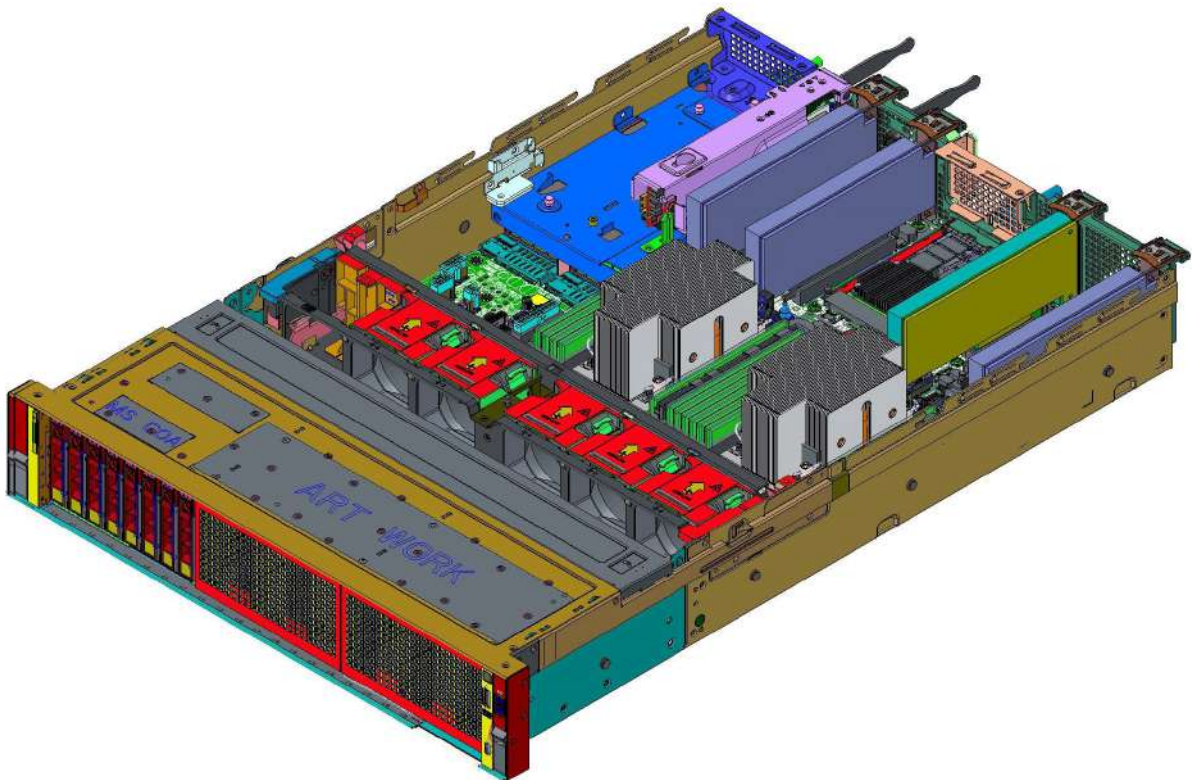


Figure 5. Inside the system 8 x 2.5-inch

Quick Resource Locator



Figure 6. Quick Resource Locator for R550

Processor



Topics:

- [Processor features](#)
- [Supported processors](#)

Processor features

The 3rd Generation Xeon® Scalable Processors stack is the next generation data center processor offering with the latest features, increased performance, and incremental memory options. This latest generation Xeon Scalable processor supports usages from entry designs that are based on Intel Xeon Silver processors to advanced capabilities offered in new Intel Xeon Platinum processor.

The following lists the features and functions that are in the upcoming 3rd Generation Intel® Xeon Scalable Processor offering:

- Faster UPI with 3 Intel Ultra Path Interconnect (Intel UPI) at 11.2 GT/s (supported in gold and platinum options)
- More, faster I/O with PCI Express 4 and up to 64 lanes (per socket) at 16 GT/s
- Enhanced Memory Performance with support for up to 2933 MT/s DIMMs

Supported processors

Following tables list the various Processor SKUs supported. Mismatched SKUs in a 2S configuration is not allowed.

| Proc | Clock Speed (GHz) | Cache (M) | UPI (GT/s) | Cores | Threads | Turbo | Memory Speed (MT/s) | Memory Capacity | TDP | R550 |
|-------|-------------------|-----------|------------|-------|---------|-------|---------------------|-----------------|-------|-----------|
| 5318Y | 2.1 | 36 | 11.2 | 24 | 48 | Turbo | 2933 | 6 TB | 165 W | Supported |
| 5317 | 3 | 18 | 11.2 | 12 | 24 | Turbo | 2933 | 6 TB | 150 W | Supported |
| 5315Y | 3.2 | 12 | 11.2 | 8 | 16 | Turbo | 2933 | 6 TB | 140 W | Supported |
| 4316 | 2.3 | 30 | 10.4 | 20 | 40 | Turbo | 2666 | 6 TB | 150 W | Supported |
| 4314 | 2.4 | 24 | 10.4 | 16 | 32 | Turbo | 2666 | 6 TB | 135 W | Supported |
| 4310 | 2.1 | 18 | 10.4 | 12 | 24 | Turbo | 2666 | 6 TB | 120 W | Supported |
| 4309Y | 2.8 | 12 | 10.4 | 8 | 16 | Turbo | 2666 | 6 TB | 105 W | Supported |

Memory subsystem

The PowerEdge R550 supports up to 16 DIMMs, with up to 1024 GB of memory and speeds of up to 3200 MT/s.

The PowerEdge R550 supports registered DIMMs (RDIMMs) that use a buffer to reduce memory loading and provide greater density, allowing for the maximum platform memory capacity.

Topics:

- [Supported memory](#)
- [Memory speed](#)

Supported memory

The table below lists the memory technologies supported by the platform.

Table 3. Supported memory technologies

| Feature | PowerEdge R550 (DDR4) |
|----------------|-----------------------|
| DIMM type | RDIMM |
| Transfer speed | 2933 MT/s |
| Voltage | 1.2 V (DDR4) |

The following table lists the supported DIMMs for the R550 at launch. For information on memory configuration, see the *Dell EMC PowerEdge R550 Installation and Service Manual* at www.dell.com/poweredgemanuals.

NOTE: Maximum memory speed supported on the system depends on the processor specifications. So, while the DIMMs supports up to 3200 MT/s, the processor may not support this memory speed. Please refer table [Supported processors](#).

Table 4. Supported DIMMs

| Capacity | DIMM Type | Config | DRAM | DIMM Max Speed | Rated Voltage |
|----------|-----------|--------|-------|----------------|---------------|
| 8 GB | RDIMM | 1R x8 | 8 GB | 3200 MT/s | 1.2 V |
| 16 GB | RDIMM | 2R x8 | 8 GB | 3200 MT/s | 1.2 V |
| 32 GB | RDIMM | 2R x8 | 16 GB | 3200 MT/s | 1.2 V |
| 64 GB | RDIMM | 2R x4 | 16 GB | 3200 MT/s | 1.2 V |

NOTE: Maximum memory speed supported on the system depends on the processor specifications. So, while the DIMMs supports up to 3200 MT/s, the processor may not support this memory speed. Please refer table [Supported processors](#).

Memory speed

The table below lists the memory configuration and performance details for R550 based on the quantity and type of DIMMs per memory channel.

Table 5. DIMM performance details

| DIMM type | Rank | Capacity | DIMM rated voltage and speed | Operating speed for DIMMs per Channel (DPC) |
|-----------|------|---------------------|------------------------------|---|
| RDIMM | 1R | 8 GB | DDR4 (1.2V), 2933 MT/S | 2933 MT/S |
| | 2R | 16 GB, 32 GB, 64 GB | DDR4 (1.2V), 2933 MT/S | 2933 MT/S |

NOTE: Maximum memory speed supported on the system depends on the processor specifications. So, while the DIMMs supports up to 3200 MT/s, the processor may not support this memory speed. Please refer table Supported processors.

Storage

Topics:

- [Storage controllers](#)
- [Supported drives](#)
- [External storage](#)

Storage controllers

Dell's RAID controller options offer performance improvements, including the fPERC solution. fPERC provides a base RAID HW controller without consuming a PCIe slot by using a small form factor and high-density connector to the base planar.

15G PERC Controller offerings will be a heavy leverage of 14G PERC family. The Value Performance levels will carry over to 15G from 14G. New to 15G, is the Harpoon-based Premium Performance tier offering. This high-end offering will drive IOPs performance and enhanced SSD performance.

Table 6. PERC series controller offerings

| Performance Level | Controller & Description |
|-------------------|--|
| Entry | S150 (SATA) SWRAID |
| Value | H345, H355, HBA355 (Internal/External) |
| Value Performance | H745, H755 |

Supported drives

The table shown below lists the internal drives supported by the R550.

Table 7. Supported drives

| Form Factor | Type | Speed | Rotational Speed | Capacities |
|-------------|----------|-------|------------------|---|
| 2.5-inch | SATA SSD | 6 Gb | N/A | 480 GB, 960 GB, 1.92 TB, 3.84 TB |
| 2.5-inch | SAS | 12 Gb | 10 K | 600 GB, 1.2 TB, 2.4 TB |
| 2.5-inch | SAS | 12 Gb | 15 K | 900 GB |
| 2.5-inch | SAS SSD | 12 Gb | N/A | 480 GB, 800 GB, 960 GB, 1.6 TB, 1.92 TB, 3.84 TB, 6.4 TB, 7.68 TB |
| 3.5-inch | SATA | 6 Gb | 7.2 K | 2 TB, 4 TB, 8 TB, 12 TB, 16 TB |
| 3.5-inch | SAS | 12 Gb | 7.2 K | 2 TB, 4 TB, 8 TB, 12 TB, 16TB |
| M.2 | SATA SSD | 6 Gb | N/A | 240 GB, 480 GB |
| uSD | N/A | N/A | uSD | 16 GB, 32 GB, 64 GB |

External storage

The R550 supports the external storage device types listed in the table below.

Table 8. Supported external storage devices

| Device Type | Description |
|----------------------------|---|
| External Tape | Supports connection to external tape products |
| NAS/IDM appliance software | Supports NAS software stack |
| JBOD | Supports connection to 12 GB MD/ME - series JBODs |

Networking

Topics:

- [Overview](#)
- [OCP 3.0 support](#)


Overview

PowerEdge offers a wide variety of options to get information moving to and from our servers. Industry best technologies are chosen, and systems management features are added by our partners to firmware to tie in with iDRAC. These adapters are rigorously validated for worry-free, fully supported use in Dell servers.

The [PowerEdge Server Adapter Matrix](#) posted to knowledge portal is the central repository for PowerEdge NIC, HBA and HCA information. The matrix covers:

- Part Numbers, Tied SKUs and Customer Kits
- Server Compatibility and Support
- Optics and Cable Support
- Systems Management
- Adapter Features
- Spec Sheet Links

This document is updated as changes happen, so be sure to bookmark it rather than downloading an offline copy to stay with the latest information.

 **NOTE:** This is a direct download link to an .XLSX and may not open in a tab as expected depending on your browser.

OCP 3.0 support

Supported OCP cards

Table 9. Supported OCP

| Form Factor | Vendor | Port type | Port speed | Port count |
|-------------|----------|-----------|------------|------------|
| OCP 3.0 | Intel | SFP+ | 10 GbE | 2 |
| OCP 3.0 | Broadcom | BT | 1 GbE | 4 |
| OCP 3.0 | Broadcom | BT | 10 GbE | 2 |
| OCP 3.0 | Broadcom | SFP28 | 25 GbE | 2 |
| OCP 3.0 | Broadcom | SFP28 | 25 GbE | 4 |
| OCP 3.0 | Broadcom | SFP+ | 10 GbE | 2 |
| OCP 3.0 | QLogic | BT | 10 GbE | 2 |
| OCP 3.0 | QLogic | SFP+ | 10 GbE | 2 |
| OCP 3.0 | QLogic | SFP28 | 25 GbE | 2 |
| OCP 3.0 | Intel | BT | 1 GbE | 4 |

Table 9. Supported OCP (continued)

| Form Factor | Vendor | Port type | Port speed | Port count |
|-------------|------------|-----------|------------|------------|
| OCP 3.0 | Intel | BT | 10 GbE | 2 |
| OCP 3.0 | Intel | SFP+ | 10 GbE | 4 |
| OCP 3.0 | Intel | SFP28 | 25 GbE | 2 |
| OCP 3.0 | Mellanox | SFP28 | 25 GbE | 2 |
| OCP 3.0 | SolarFlare | SFP28 | 25 GbE | 2 |
| OCP 3.0 | SolarFlare | SFP28 | 25 GbE | 2 |

OCP NIC 3.0 vs. rack Network Daughter Card comparisons

Table 10. OCP 3.0, 2.0, and rNDC NIC comparison

| Form Factor | Dell rNDC | OCP 2.0 (LOM Mezz) | OCP 3.0 | Notes |
|----------------|-----------|--------------------|-----------|--|
| PCIe Gen | Gen 3 | Gen 3 | Gen 4 | Supported OCP3 are SFF (small form factor) |
| Max PCIe Lanes | x8 | Up to x16 | Up to x16 | See server slot priority matrix |
| Shared LOM | Yes | Yes | Yes | This is iDRAC port redirect |
| Aux Power | Yes | Yes | Yes | Used for Shared LOM |

OCP form factors

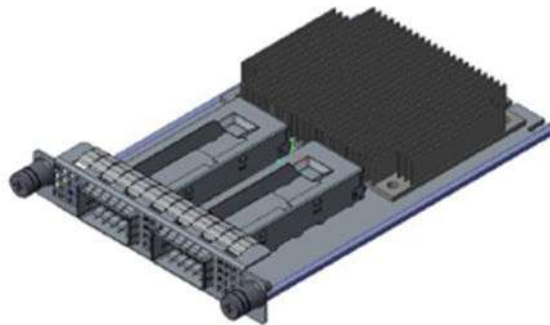


Figure 7. OCP 3.0 small card form factor (LS)

Table 11. OCP 3.0 Feature List

| | OCP 3.0 |
|----------------|-------------------------|
| Form factor | SFF and LFF |
| PCIe Gen | Gen4 |
| Max PCIe width | X16 |
| Max of ports | 4 |
| Port type | BT/SFP/SFP+/SFP28/SFP56 |

Table 11. OCP 3.0 Feature List (continued)

| | OCP 3.0 |
|-------------------|----------------|
| Max port speed | 100Gbe |
| NC-SI | Yes |
| WoL | Yes |
| Power consumption | 15 W – 150 W |

Expansion cards

NOTE: When an expansion card is not supported or missing, the iDRAC and Lifecycle Controller logs an event. This does not prevent your system from booting. However, if a F1/F2 pause occurs with an error message, see *Troubleshooting expansion cards* section in the *Dell EMC PowerEdge Servers Troubleshooting Guide* at www.dell.com/poweredgemanuals.

Topics:

- [Expansion card installation guidelines](#)

Expansion card installation guidelines

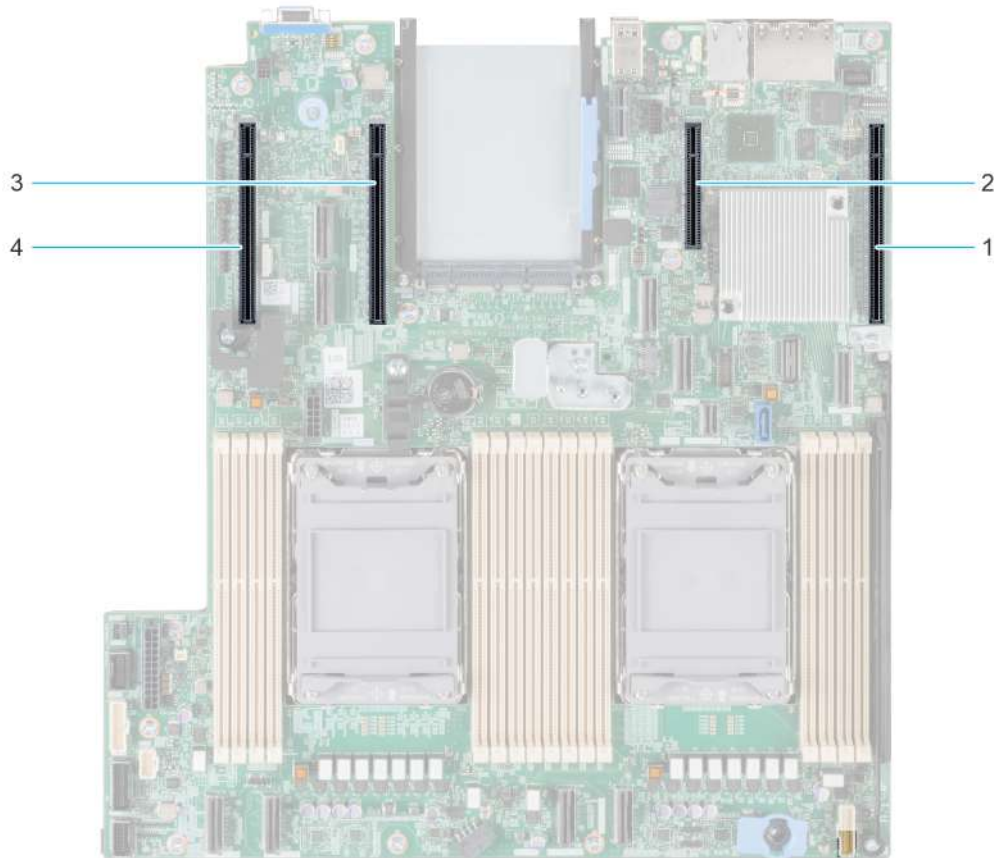



Figure 8. Expansion card slot connectors

1. Slot 1
2. Slot 2
3. Slot 5
4. Slot 6

The following table describes the expansion card configurations:

Table 12. Supported configurations

| Configurations | Expansion card risers | PCIe Slots | Controlling processor | Height | Length | Slot width |
|----------------|-----------------------|------------|-----------------------|-------------|-------------|------------|
| Config 0 | N/A | 1 | Processor 1 | Low profile | Half length | x16 |
| | | 2 | PCH | Low profile | Half length | x4 |
| | | 5 | Processor 2 | Low profile | Half length | x16 |
| | | 6 | Processor 2 | Low profile | Half length | x16 |
| Config 0-1 | N/A | 1 | Processor 1 | Low profile | Half length | x16 |
| | | 2 | PCH | Low profile | Half length | x4 |

 **NOTE:** The expansion-card slots are not hot-swappable.

The following table provides guidelines for installing expansion cards to ensure proper cooling and mechanical fit. The expansion cards with the highest priority should be installed first using the slot priority indicated. All the other expansion cards should be installed in the card priority and slot priority order.

Table 13. Configuration 0

| Card type | Slot priority | Maximum number of cards |
|------------------------------|-----------------|-------------------------|
| Dell Serial port module (LP) | 1 | 1 |
| fPERC | Integrated slot | 1 |
| Internal PERC adapter | 1 | 1 |
| fPERC11 H355, Front | Integrated slot | 1 |
| 12Gbps SAS HBA | 1 | 1 |
| Intel (NIC: 100Gb) | 5, 6, 1 | 3 |
| Mellanox (NIC: 100Gb) | 5, 6, 1 | 3 |
| Broadcom (NIC: 25Gb) | 5, 6, 1, 2 | 1 |
| Intel (NIC: 25Gb) | 5, 6, 1, 2 | 1 |
| Mellanox (NIC: 25Gb) | Not supported | N/a |
| Mellanox (NIC: 25Gb, LP) | 1, 6, 5 | 3 |
| Qlogic (NIC: 25Gb) | 5, 6, 1, 2 | 1 |
| SolarFlare (NIC: 25Gb) | 5, 6, 1, 2 | 4 |
| Broadcom (NIC: 10Gb) | 5, 6, 1, 2 | 4 |
| Intel (NIC: 10Gb) | 5, 6, 1, 2 | 4 |
| Qlogic (NIC: 10Gb) | 5, 6, 1, 2 | 4 |
| Broadcom (NIC: 1Gb) | 5, 6, 1, 2 | 4 |
| Intel (NIC: 1Gb) | 5, 6, 1, 2 | 4 |
| Mellanox (NIC: HDR100 VPI) | Not supported | N/a |
| Mellanox (NIC: HDR VPI) | Not supported | N/a |
| Broadcom (OCP: 25Gb) | Integrated slot | 1 |
| Mellanox (OCP 3: 25Gb) | Integrated slot | 1 |
| Intel (OCP: 25Gb) | Integrated slot | 1 |
| Marvell (OCP: 25Gb) | Integrated slot | 1 |
| Mellanox (OCP: 25Gb) | Integrated slot | 1 |

Table 13. Configuration 0 (continued)

| Card type | Slot priority | Maximum number of cards |
|----------------------------|-----------------|-------------------------|
| SolarFlare (OCP: 25Gb) | Integrated slot | 1 |
| Broadcom (OCP: 10Gb) | Integrated slot | 1 |
| Marvell (OCP: 10Gb) | Integrated slot | 1 |
| Intel (OCP: 10Gb) | Integrated slot | 1 |
| Broadcom (OCP: 1Gb) | Integrated slot | 1 |
| Intel (OCP: 1Gb) | Integrated slot | 1 |
| Dell External PERC Adapter | 5, 6, 1, 2 | 4 |
| Dell BOSS S1 Module | Integrated slot | 1 |
| Samsung (PCIe SSD AIC) | 5, 6, 1, 2 | 4 |
| Intel (PCIe SSD) | Not supported | N/a |

Table 14. Configuration0-1

| Card type | Slot priority | Maximum number of cards |
|------------------------------|-----------------|-------------------------|
| Dell Serial port module (LP) | 1 | 1 |
| fPERC | Integrated slot | 1 |
| Internal PERC adapter | 1 | 1 |
| fPERC11 H355, Front | Integrated slot | 1 |
| 12Gbps SAS HBA | 1 | 1 |
| Intel (NIC: 100Gb) | 1 | 1 |
| Mellanox (NIC: 100Gb) | 1 | 1 |
| Broadcom (NIC: 25Gb) | 1, 2 | 1 |
| Intel (NIC: 25Gb) | 1, 2 | 1 |
| Mellanox (NIC: 25Gb) | Not supported | N/a |
| Mellanox (NIC: 25Gb, LP) | 1 | 1 |
| Qlogic (NIC: 25Gb) | 1, 2 | 1 |
| SolarFlare (NIC: 25Gb) | 1, 2 | 4 |
| Broadcom (NIC: 10Gb) | 1, 2 | 4 |
| Intel (NIC: 10Gb) | 1, 2 | 4 |
| Qlogic (NIC: 10Gb) | 1, 2 | 4 |
| Broadcom (NIC: 1Gb) | 1, 2 | 4 |
| Intel (NIC: 1Gb) | 1, 2 | 4 |
| Mellanox (NIC: HDR100 VPI) | Not supported | N/a |
| Mellanox (NIC: HDR VPI) | Not supported | N/a |
| Broadcom (OCP: 25Gb) | Integrated slot | 1 |
| Intel (OCP: 25Gb) | Integrated slot | 1 |
| Marvell (OCP: 25Gb) | Integrated slot | 1 |
| Mellanox (OCP: 25Gb) | Integrated slot | 1 |
| Mellanox (OCP 3: 25Gb) | Integrated slot | 1 |

Table 14. Configuration0-1 (continued)

| Card type | Slot priority | Maximum number of cards |
|----------------------------|----------------------|--------------------------------|
| SolarFlare (OCP: 25Gb) | Integrated slot | 1 |
| Broadcom (OCP: 10Gb) | Integrated slot | 1 |
| Marvell (OCP: 10Gb) | Integrated slot | 1 |
| Intel (OCP: 10Gb) | Integrated slot | 1 |
| Broadcom (OCP: 1Gb) | Integrated slot | 1 |
| Intel (OCP: 1Gb) | Integrated slot | 1 |
| Dell External PERC Adapter | 1, 2 | 4 |
| Dell BOSS S1 Module | Integrated slot | 1 |
| Samsung (PCIe SSD AIC) | 1, 2 | 4 |
| Intel (PCIe SSD) | Not supported | N/a |

Power, thermal, and acoustics

PowerEdge servers have an extensive collection of sensors that automatically track thermal activity, which helps regulate temperature thereby reducing server noise and power consumption. The table below lists the tools and technologies Dell offers to lower power consumption and increase energy efficiency.

Topics:

- [Power](#)
- [Thermal](#)
- [Acoustics](#)

Power

Table 15. Power tools and technologies

| Feature | Description |
|-----------------------------------|--|
| Power Supply Units(PSU) portfolio | Dell's PSU portfolio includes intelligent features such as dynamically optimizing efficiency while maintaining availability and redundancy. Find additional information in the Power supply units section. |
| Tools for right sizing | [Include EIPT description.] |
| Industry Compliance | Dell's servers are compliant with all relevant industry certifications and guide lines, including 80 PLUS, Climate Savers and ENERGY STAR. |
| Power monitoring accuracy | PSU power monitoring improvements include: <ul style="list-style-type: none"> • Dell's power monitoring accuracy is currently 1%, whereas the industry standard is 5%. • More accurate reporting of power. • Better performance under a power cap. |
| Power capping | Use Dell's systems management to set the power cap limit for your systems to limit the output of a PSU and reduce system power consumption. Dell is the first hardware vendor to leverage Intel Node Manager for circuit-breaker fast capping. |
| Systems Management | iDRAC Enterprise and Datacenter provides server- level management that monitors, reports and controls power consumption at the processor, memory and system level. Dell OpenManage Power Center delivers group power management at the rack, row and data center level for servers, power distribution units and uninterruptible power supplies. |
| Active power management | — |
| Fresh Air cooling | Refer to ASHRAE A3/A4 Thermal Restriction. |
| Rack infrastructure | Dell offers some of the industry's highest-efficiency power infrastructure solutions, including <ul style="list-style-type: none"> • Power distribution units (PDUs). • Uninterruptible power supplies (UPSs). |

Table 15. Power tools and technologies (continued)

| Feature | Description |
|---------|---|
| | <ul style="list-style-type: none"> • Energy Smart containment rack enclosures. • Find additional information at: http://content.dell.com/us/en/enterprise/power-and-cooling-technologies-components-rack-infrastructure.aspx. |

Thermal

PowerEdge servers have an extensive collection of sensors that automatically track thermal activity, which helps regulate temperature thereby reducing server noise and power consumption.

Acoustics

Acoustical performance

Dell EMC PowerEdge R550 are rack-mount server whose acoustical out ranges from that appropriate for an office to that of data centers.

Acoustical performance is provided in terms of the following configurations:

- R550 single socket
- R550 typical 3.5-inch
- R550 typical 2.5-inch
- R550 feature rich

Acoustical configuration details are provided in the tables below.

Table 16. Acoustical configurations of R550

| Configuration | R550 single socket | R550 typical 3.5-inch | R550 typical 2.5-inch | R550 feature rich |
|--------------------|---|---|---|---|
| Processor Type | 3rd Generation Intel® Xeon Scalable Processor | 3rd Generation Intel® Xeon Scalable Processor | 3rd Generation Intel® Xeon Scalable Processor | 3rd Generation Intel® Xeon Scalable Processor |
| Processor TDP | 105 W | 105 W | 105 W | 150 W |
| Processor Quantity | 1 | 2 | 2 | 2 |
| RDIMM Memory | 8 GB, DDR4 | 8 GB, DDR4 | 8 GB, DDR4 | 16 GB, DDR4 |
| Memory Quantity | 2 | 4 | 4 | 8 |
| Backplane Type | 8 x 3.5-inch | 8 x 3.5-inch | 8 x 2.5-inch | 16 x 2.5-inch |
| HDD Type | SATA 3.5-inch 7.2K | SAS 3.5-inch 7.2K | SAS 2.5-inch 7.2K | SAS 2.5-inch 7.2K |
| HDD Quantity | 6 | 6 | 8 | 16 |
| Flash Drives | NA | NA | NA | NA |
| Flash Quantity | NA | NA | NA | NA |
| PSU Type | 800 W | 800 W | 800 W | 1400 W |
| PSU Quantity | 1 | 2 | 2 | 2 |
| OCP | 4 x 1G | 4 x 1G | 4 x 1G | 2 x 10G |
| PCI 1 | NA | NA | NA | NA |
| PCI 2 | NA | NA | NA | NA |

Table 16. Acoustical configurations of R550 (continued)

| Configuration | R550 single socket | R550 typical 3.5-inch | R550 typical 2.5-inch | R550 feature rich |
|---------------|--------------------|-----------------------|-----------------------|-------------------|
| PCI 3 | NA | NA | NA | NA |
| PCI 4 | NA | NA | NA | NA |
| PCI 5 | NA | NA | NA | NA |
| PCI 6 | NA | NA | NA | NA |
| M.2 BOSS | NA | NA | NA | NA |
| Front PERC | PERC H345, H355 | PERC H345, H355 | PERC H345, H355 | PERC H345, H355 |

Table 17. Acoustical performance of R550 acoustical configurations

| Configuration | R550 single socket | R550 typical 3.5-inch | R550 typical 2.5-inch | R550 feature rich | |
|--|--|-----------------------|-----------------------|-------------------|-----|
| Acoustical Performance: Idle/ Operating @ 23 °C Ambient | | | | | |
| L _{wA,m} (B) | Idle | 4.7 | 5.0 | 4.7 | 5.3 |
| | Operating | 5.0 | 5.0 | 4.8 | 5.3 |
| K _v (B) | Idle | 0.4 | 0.4 | 0.4 | 0.4 |
| | Operating | 0.4 | 0.4 | 0.4 | 0.4 |
| L _{pA,m} (dB) | Idle | 33 | 34 | 33 | 40 |
| | Operating | 37 | 38 | 35 | 41 |
| Prominent tones | No prominent tones in Idle and Operating | | | | |
| Acoustical Performance: Idle @ 28 °C Ambient | | | | | |
| L _{wA,m} (B) | 5.0 | 5.3 | 5.1 | 5.6 | |
| K _v (B) | 0.4 | 0.4 | 0.4 | 0.4 | |
| L _{pA,m} (dB) | 36 | 35 | 36 | 41 | |
| Acoustical Performance: Max. Loading @ 35 °C Ambient | | | | | |
| L _{wA,m} (B) | 5.5 | 5.5 | 5.4 | 5.8 | |
| K _v (B) | 0.4 | 0.4 | 0.4 | 0.4 | |
| L _{pA,m} (dB) | 40 | 41 | 40 | 44 | |

L_{wA,m}: The declared mean A-weighted sound power level (L_{WA}) is calculated per section 5.2 of ISO 9296 (2017) with data collected using the methods described in ISO 7779 (2010). Data presented here may not be fully compliant with ISO 7779.

L_{pA,m}: The declared mean A-weighted emission sound pressure level is at the bystander position per section 5.3 of ISO 9296 (2017) and measured using methods described in ISO 7779 (2010). The system is placed in a 24U rack enclosure, 25cm above a reflective floor. Data presented here may not be fully compliant with ISO 7779.

Prominent tones: Criteria of D.6 and D.11 of ECMA-74 are followed to determine if discrete tones are prominent and to report them, if so.

Idle mode: The steady-state condition in which the server is energized but not operating any intended function.

Operating mode: The maximum of the steady state acoustical output at 50% of Processor TDP or active HDDs per C.9.3.2 in ECMA-74 .

Each configuration has been tested according to Dell EMC acoustical standards for rack-mounted servers.

Rack, rails, and cable management

Key factors in selecting the proper rails include, Identifying:

- Type of rack in which the rails will be installed
- Spacing between the front and rear mounting flanges of the rack
- Type and location of any equipment mounted on the rear of the rack such as power distribution units (PDUs), and the overall depth of the rack

Refer the [DellEMC Enterprise Systems Rail Sizing and Rack Compatibility Matrix](#) for the following information:

- Specific details about rail types and their functionalities
- Rail adjustability ranges for various rack mounting flange types
- Rail depth with and without cable management accessories
- Rack types supported for various rack mounting flange types

Topics:

- [Rails information](#)
- [Cable Management Arm](#)
- [Strain Relief Bar](#)

Rails information

The R550 supports both sliding rails and static rails. Both rails have a slim rail design that supports the wide system chassis.

Sliding rails

The sliding rails, shown in the figure below, allow the system to be fully extended out of the rack for service. The sliding rails have a Cable Management Arm (CMA) and a Strain Relief Bar (SRB) option.

There are two types of sliding rails available:

- Ready Rails II sliding rails
- Stab-in/Drop-in sliding rails

B21 Ready Rails II sliding rails for 4-post racks

- Supports Drop-in installation of the chassis to the rails
- Supports tool-less installation in 19-inch EIA-310-E compliant square or unthreaded round hole 4-post racks including all generations of Dell racks
- Supports tooled installation in 19-inch EIA-310-E compliant threaded hole 4-post racks
- Supports full extension of the system out of the rack to allow serviceability of key internal components
- Supports optional Cable Management Arm (CMA)
- Supports optional Strain Relief Bar (SRB)

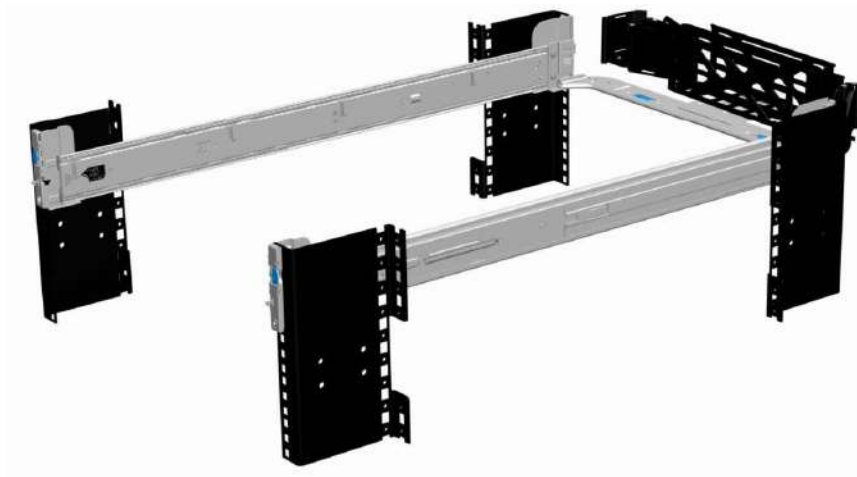


Figure 9. Sliding rails with optional CMA



Figure 10. Sliding rails with optional SRB

B22 Stab-in/Drop-in sliding rails for 4-post racks

- Supports Drop-in or Stab-in installation of the chassis to the rails
- Supports tool-less installation in 19-inch EIA-310-E compliant square, unthreaded round hole racks including all generations of Dell racks.

Also supports tool-less installation in threaded round hole 4-post racks

- Supports full extension of the system out of the rack to allow serviceability of key internal components
- Supports optional Cable Management Arm (CMA)

i NOTE: For situations where CMA support is not required, the outer CMA mounting brackets can be uninstalled from the sliding rails. This reduces the overall length of the rails and eliminates the potential interferences with rear mounted PDUs or the rear rack door.

- Supports optional Strain Relief Bar (SRB)

i NOTE: Scan the QRL code for the documentation and troubleshooting information regarding the installation procedures for Drop-in/Stab-in rail types.

Static rails

The static rails, shown in the figure below, support a wider variety of racks than the sliding rails, but do not support serviceability in the rack. The static rails are not compatible with the CMA and SRB.

B20 Ready Rails static rails for 4-post and 2-post racks

- Supports Stab-in installation of the chassis to the rails
- Supports tool-less installation in 19-inch EIA-310-E compliant square or unthreaded round hole 4-post racks including all generations of Dell racks
- Supports tooled installation in 19-inch EIA-310-E compliant threaded hole 4-post and 2-post racks
- Supports tooled installation in Dell EMC Titan or Titan-D rack

NOTE:

- Screws are not included with the static rail kit since racks are offered with various thread types. The screws are provided for mounting static rails in racks with threaded mounting flanges.
- Screw head diameter should be 10mm or less.

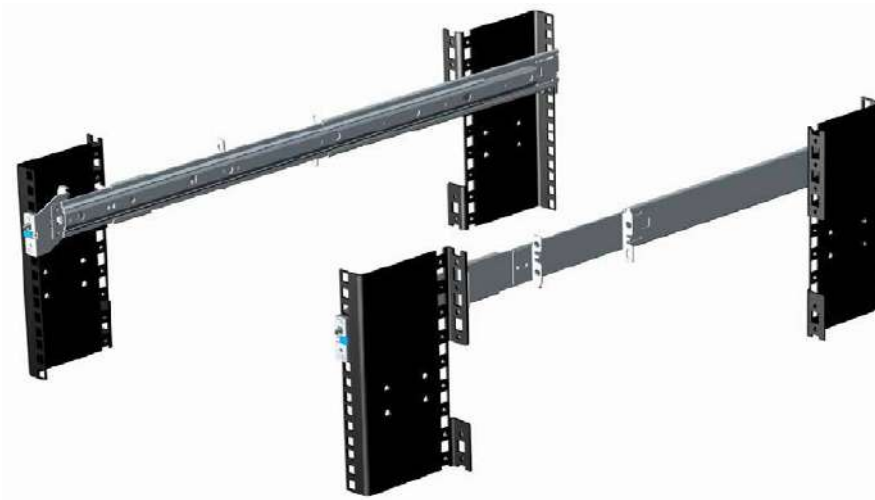


Figure 11. Static rails

Cable Management Arm

The optional Cable Management Arm (CMA) for the system organizes and secures the cords and cables exiting the back of the server and unfolds to allow the server to extend out of the rack without having to detach the cables.

Some key features of the CMA include:

- Large U-shaped baskets to support dense cable loads
- Open vent pattern for optimal airflow
- Support for mounting on either side by swinging the spring-loaded brackets from one side to the other
- Utilizes hook-and-loop straps rather than plastic tie wraps to eliminate the risk of cable damage during cycling
- Includes a low-profile fixed tray to both support and retain the CMA in its fully closed position
- Both the CMA and the tray mount without the use of tools through simple and intuitive snap-in designs

The CMA can be mounted to either side of the sliding rails without the use of tools or the need for conversion. For systems with one power supply unit (PSU), it is recommended to mount on the side opposite to that of the power supply to allow easier access to it and the rear drives (if applicable) for service or replacement.



Strain Relief Bar

The optional Strain Relief Bar (SRB) for the system organizes and secures cables exiting the back of the server.

Sliding rails with optional SRB:

- Support tool-less attachment to rails
- Support two depth positions to accommodate various cable loads and rack depths
- Support cable loads and controls stress on server connectors
- Support cables can be segregated into discrete, purpose-specific bundles

Supported Operating Systems

The PowerEdge R550 system supports the following operating systems:

- Canonical® Ubuntu® Server LTS
- Citrix® Hypervisor®
- Microsoft® Windows Server® with Hyper-V
- Red Hat® Enterprise Linux
- SUSE® Linux Enterprise server
- VMware® ESXi®

Links to specific OS versions and editions, certification matrices, Hardware Compatibility Lists (HCL) portal, and Hypervisor support are available at [Dell EMC Enterprise Operating Systems](#).

Dell EMC OpenManage systems management

Dell EMC OpenManage Portfolio

Simplifying hardware management through ease of use and automation

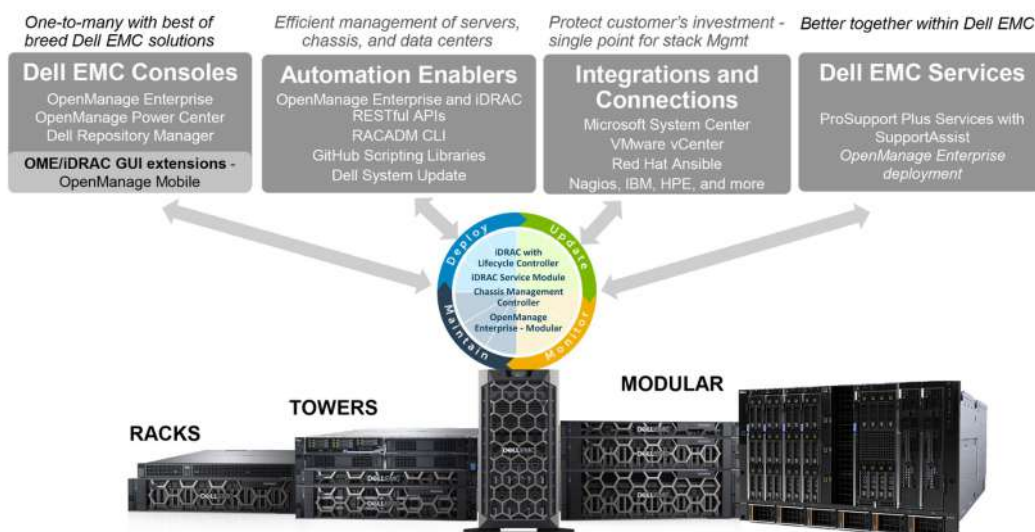


Figure 12. Dell EMC OpenManage Portfolio

Dell EMC delivers management solutions that help IT Administrators effectively deploy, update, monitor, and manage IT assets. OpenManage solutions and tools enable you to quickly respond to problems by helping them to manage Dell EMC servers effectively and efficiently; in physical, virtual, local, and remote environments, operating in-band, and out-of-band (agent-free). The OpenManage portfolio includes innovative embedded management tools such as the integrated Dell Remote Access Controller (iDRAC), Chassis Management Controller and Consoles like OpenManage Enterprise, OpenManage Power Manager plug in, and tools like Repository Manager.

Dell EMC has developed comprehensive systems management solutions based on open standards and has integrated with management consoles that can perform advanced management of Dell hardware. Dell EMC has connected or integrated the advanced management capabilities of Dell hardware into offerings from the industry's top systems management vendors and frameworks such as Ansible, thus making Dell EMC platforms easy to deploy, update, monitor, and manage.

The key tools for managing Dell EMC PowerEdge servers are iDRAC and the one-to-many OpenManage Enterprise console. OpenManage Enterprise helps the system administrators in complete lifecycle management of multiple generations of PowerEdge servers. Other tools such as Repository Manager, which enables simple yet comprehensive change management.

OpenManage tools integrate with systems management framework from other vendors such as VMware, Microsoft, Ansible, and ServiceNow. This enables you to use the skills of the IT staff to efficiently manage Dell EMC PowerEdge servers.

Topics:

- [Server and Chassis Managers](#)
- [Dell EMC consoles](#)
- [Automation Enablers](#)
- [Integration with third-party consoles](#)
- [Connections for third-party consoles](#)
- [Dell EMC Update Utilities](#)
- [Dell resources](#)

Server and Chassis Managers

- Integrated Dell Remote Access Controller (iDRAC)
- iDRAC Service Module (iSM)

Dell EMC consoles

- Dell EMC OpenManage Enterprise
- Dell EMC Repository Manager (DRM)
- Dell EMC OpenManage Enterprise Power Manager plugin to OpenManage Enterprise
- Dell EMC OpenManage Mobile (OMM)

Automation Enablers

- OpenManage Ansible Modules
- iDRAC RESTful APIs (Redfish)
- Standards-based APIs (Python, PowerShell)
- RACADM Command Line Interface (CLI)
- GitHub Scripting Libraries

Integration with third-party consoles

- Dell EMC OpenManage Integrations with Microsoft System Center
- Dell EMC OpenManage Integration for VMware vCenter (OMIVV)
- Dell EMC OpenManage Ansible Modules
- Dell EMC OpenManage Integration with ServiceNow

Connections for third-party consoles

- Micro Focus and other HPE tools
- OpenManage Connection for IBM Tivoli
- OpenManage Plug-in for Nagios Core and XI

Dell EMC Update Utilities


- Dell System Update (DSU)
- Dell EMC Repository Manager (DRM)
- Dell EMC Update Packages (DUP)
- Dell EMC Server Update Utility (SUU)
- Dell EMC Platform Specific Bootable ISO (PSBI)

Dell resources

For additional information about white papers, videos, blogs, forums, technical material, tools, usage examples, and other information, go to the OpenManage page at <https://www.dell.com/openmanagemanuals> or the following product pages:

Table 18. Dell resources

| Resource | Location |
|--|---|
| Integrated Dell Remote Access Controller (iDRAC) | https://www.dell.com/idracmanuals |
| iDRAC Service Module (iSM) | https://www.dell.com/support/kbdoc/000178050/ |
| OpenManage Ansible Modules | https://www.dell.com/support/kbdoc/000177308/ |
| OpenManage Essentials (OME) | https://www.dell.com/support/kbdoc/000175879/ |
| OpenManage Mobile (OMM) | https://www.dell.com/support/kbdoc/000176046 |
| OpenManage Integration for VMware vCenter (OMIVV) | https://www.dell.com/support/kbdoc/000176981/ |
| OpenManage Integration for Microsoft System Center (OMIMSSC) | https://www.dell.com/support/kbdoc/000147399 |
| Dell EMC Repository Manager (DRM) | https://www.dell.com/support/kbdoc/000177083 |
| Dell EMC System Update (DSU) | https://www.dell.com/support/kbdoc/000130590 |
| Dell EMC Platform Specific Bootable ISO (PSBI) | Dell.com/support/article/sln296511 |
| Dell EMC Chassis Management Controller (CMC) | www.dell.com/support/article/sln311283 |
| OpenManage Connections for Partner Consoles | https://www.dell.com/support/kbdoc/000146912 |
| OpenManage Enterprise Power Manager | https://www.dell.com/support/kbdoc/000176254 |
| OpenManage Integration with ServiceNow (OMISNOW) | Dell.com/support/article/sln317784 |

 **NOTE:** Features may vary by server. Please refer to the product page on <https://www.dell.com/manuals> for details.

Dell Technologies Services

Dell Technologies Services include a wide, customizable range of service choices to simplify the assessment, design, implementation, management and maintenance of IT environments and to help you transition from platform to platform. Depending on your current business requirements and the level of service right for you, we provide factory, on-site, remote, modular, and specialized services that fit your needs and budget. We'll help with a little or a lot—your choice—and provide access to our global resources.

For more information, see DellEMC.com/Services.

Topics:

- [Dell EMC ProDeploy Enterprise Suite](#)
- [Dell EMC Remote Consulting Services](#)
- [Dell EMC Data Migration Service](#)
- [Dell EMC ProSupport Enterprise Suite](#)
- [Dell EMC ProSupport Plus for Enterprise](#)
- [Dell EMC ProSupport for Enterprise](#)
- [Dell EMC ProSupport One for Data Center](#)
- [ProSupport for HPC](#)
- [Support Technologies](#)
- [Dell Technologies Education Services](#)
- [Dell Technologies Consulting Services](#)
- [Dell EMC Managed Services](#)

Dell EMC ProDeploy Enterprise Suite

ProDeploy Enterprise Suite gets your server out of the box and into optimized production—fast. Our elite deployment engineers with broad and deep experience utilizing best-in-class processes along with our established global scale can help you around the clock and around the globe. From simple to the most complex server installations and software integration, we take the guess work and risk out of deploying your new server technology.

| | | Basic Deployment | ProDeploy | ProDeploy Plus |
|-----------------|--|------------------|------------------|----------------|
| Pre-deployment | Single point of contact for project management | - | ● | In-region |
| | Site readiness review | - | ● | ● |
| | Implementation planning | - | ● | ● |
| | SAM engagement for ProSupport Plus entitled devices | - | - | ● |
| Deployment | Deployment service hours | Business hours | 24x7 | 24x7 |
| | Remote guidance for hardware installation or Onsite hardware installation and packaging material removal | Onsite | Remote or Onsite | Onsite |
| | Install and configure system software | - | Remote | Onsite |
| | Install support software and connect with Dell Technologies | - | ● | ● |
| | Project documentation with knowledge transfer | - | ● | ● |
| Post-deployment | Deployment verification | - | ● | ● |
| | Configuration data transfer to Dell EMC technical support | - | ● | ● |
| | 30-days of post-deployment configuration assistance | - | - | ● |
| | Training credits for Dell EMC Education Services | - | - | ● |

Figure 13. ProDeploy Enterprise Suite capabilities

NOTE: Hardware installation not applicable on selected software products.

Dell EMC ProDeploy Plus

From beginning to end, ProDeploy Plus provides the skill and scale needed to successfully execute demanding deployments in today's complex IT environments. Certified Dell EMC experts start with extensive environmental assessments and detailed migration planning and recommendations. Software installation includes set up of most versions of Dell EMC SupportAssist and OpenManage system management utilities. Post-deployment configuration assistance, testing, and product orientation services are also available.

Dell EMC ProDeploy

ProDeploy provides full service installation and configuration of both server hardware and system software by certified deployment engineers including set up of leading operating systems and hypervisors as well as most versions of Dell EMC SupportAssist and OpenManage system management utilities. To prepare for the deployment, we conduct a site readiness review and implementation planning exercise. System testing, validation, and full project documentation with knowledge transfer complete the process.

Basic Deployment

Basic Deployment delivers worry-free professional installation by experienced technicians who know Dell EMC servers inside and out.

Dell EMC Server Configuration Services

With Dell EMC Rack Integration and other Dell EMC PowerEdge Server Configuration Services, you save time by receiving your systems racked, cabled, tested, and ready to integrate into the data center. Dell EMC staff pre-configure RAID, BIOS and iDRAC settings, install system images, and even install third-party hardware and software.

For more information, see [Server Configuration Services](#).

Dell EMC Residency Services

Residency Services helps customers transition to new capabilities quickly with the assistance of on-site or remote Dell EMC experts whose priorities and time you control. Residency experts can provide post implementation management and knowledge transfer related to a new technology acquisition or day-to-day operational management of the IT infrastructure.

Dell EMC Remote Consulting Services

When you are in the final stages of your PowerEdge server implementation, you can rely on Dell EMC Remote Consulting Services and our certified technical experts to help you optimize your configuration with best practices for your software, virtualization, server, storage, networking, and systems management.

Dell EMC Data Migration Service

Protect your business and data with our single point of contact to manage your data migration project. Your project manager will work with our experienced team of experts to create a plan using industry-leading tools and proven processes based on global best practices to migrate your existing files and data so your business system get up and running quickly and smoothly.

Dell EMC ProSupport Enterprise Suite

With the ProSupport Enterprise Suite, we help keep your IT systems running smoothly, so you can focus on running your business. We will help maintain peak performance and availability of your most essential workloads. ProSupport Enterprise Suite is a suite of support services that enable you to build the solution that is right for your organization.

Choose support models based on how you use technology and where you want to allocate resources. From the desktop to the data center, address everyday IT challenges, such as unplanned downtime, mission-critical needs, data and asset protection, support planning, resource allocation, software application management and more. Optimize IT resources by choosing the right support model.



Figure 14. Dell EMC ProSupport Enterprise Suite

Dell EMC ProSupport Plus for Enterprise

When you purchase your PowerEdge server, we recommend ProSupport Plus, our proactive and preventative support service for your business-critical systems. ProSupport Plus provides you with all the benefits of ProSupport, plus the following:

- An assigned Services Account Manager who knows your business and your environment
- Immediate advanced troubleshooting from an engineer who understands your PowerEdge server
- Personalized, preventive recommendations based on analysis of support trends and best practices from across the Dell Technologies infrastructure solutions customer base to reduce support issues and improve performance
- Predictive analysis for issue prevention and optimization enabled by SupportAssist
- Proactive monitoring, issue detection, notification, and automated case creation for accelerated issue resolution enabled by SupportAssist
- On-demand reporting and analytics-based recommendations enabled by SupportAssist and TechDirect

Dell EMC ProSupport for Enterprise

Our ProSupport service offers highly trained experts around the clock and around the globe to address your IT needs. We help minimize disruptions and maximize availability of PowerEdge server workloads with:

- 24x7 support through phone, chat and online
- Predictive, automated tools and innovative technology
- A central point of accountability for all hardware and software issues
- Collaborative 3rd party support
- Hypervisor, operating system and application support
- Consistent experience regardless of where you are located or what language you speak
- Optional onsite parts and labor response options including next business day or four-hour mission critical

i **NOTE:** Subject to service offer country availability.

Enterprise Support Services Feature Comparison

| | Basic | ProSupport | ProSupport Plus |
|---|-------------------|--|---|
| Remote technical support | 9x5 | 24x7 | 24x7 |
| Covered products | Hardware | Hardware Software | Hardware Software |
| Onsite hardware support | Next business day | Next business day or 4hr mission critical | Next business day or 4 hr mission critical |
| 3 rd party collaborative assistance | | ● | ● |
| Automated issue detection & proactive case creation | | ● | ● |
| Self-service case initiation and management | | ● | ● |
| Access to software updates | | ● | ● |
| Priority access to specialized support experts | | | ● |
| 3 rd party software support | | | ● |
| Assigned Services Account Manager | | | ● |
| Personalized assessments and recommendations | | | ● |
| Semiannual systems maintenance | | | ● |

Availability and terms of Dell Technologies services vary by region and by product. For more information, please view our Service Descriptions available on Dell.com.

Figure 15. Dell EMC Enterprise Support model

Dell EMC ProSupport One for Data Center

ProSupport One for Data Center offers flexible site-wide support for large and distributed data centers with more than 1,000 assets. This offering is built on standard ProSupport components that leverage our global scale but are tailored to your company's needs. While not for everyone, this service option offers a truly unique solution for Dell Technologies largest customers with the most complex environments.

- Team of assigned Services Account Managers with remote, on-site options
- Assigned ProSupport One technical and field engineers who are trained on your environment and configurations
- On-demand reporting and analytics-based recommendations enabled by SupportAssist and TechDirect
- Flexible on-site support and parts options that fit your operational model
- A tailored support plan and training for your operations staff

ProSupport for HPC

The ProSupport for HPC provides solution-aware support including:

- Access to senior HPC experts
- Advanced HPC cluster assistance: performance, interoperability & configuration
- Enhanced HPC solution level end-to-end support
- Remote pre-support engagement with HPC Specialists during ProDeploy implementation

Learn more at DellEMC.com/HPC-Services.

ProSupport Add-on for HPC

Delivering a true end-to-end support experience across your HPC environment

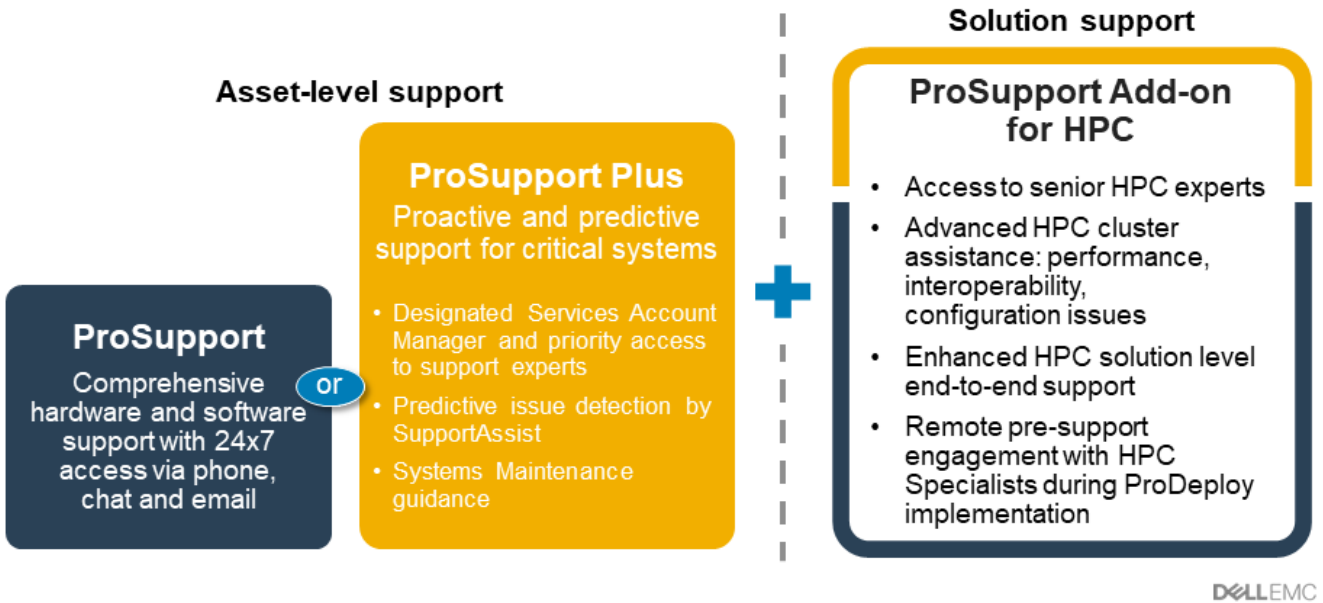


Figure 16. ProSupport for HPC

Support Technologies

Powering your support experience with predictive, data-driven technologies.

Dell EMC SupportAssist

The best time to solve a problem is before it happens. The automated proactive and predictive technology SupportAssist helps reduce steps and time to resolution, often detecting issues before they become a crisis. Benefits include:

- Value—SupportAssist is available to all customers at no additional charge
- Improve productivity—replace manual, high-effort routines with automated support
- Accelerate time to resolution—receive issue alerts, automatic case creation, and proactive contact from Dell EMC experts
- Gain insight and control—optimize enterprise devices with on-demand ProSupport Plus reporting in TechDirect, and get predictive issue detection before the problem starts

NOTE: SupportAssist is included with all support plans, but features vary based on service level agreement.

| | Basic Hardware Warranty | ProSupport | ProSupport Plus |
|---|-------------------------|------------|-----------------|
| Automated issue detection and system state information collection | • | • | • |
| Proactive, automated case creation and notification | | • | • |
| Predictive issue detection for failure prevention | | | • |
| Recommendation reporting available on-demand in TechDirect | | | • |

Figure 17. SupportAssist model

Get started at Dell.com/SupportAssist

Dell EMC TechDirect

Boost IT team productivity when supporting Dell EMC systems. With over 1.4 million self-dispatches processed each year, TechDirect has proven its effectiveness as a support tool. You can:

- Self-dispatch replacement parts
- Request technical support
- Integrate APIs into your help desk

Or, access all your Dell EMC certification and authorization requirements. Train your staff on Dell EMC products, as TechDirect allows you to:

- Download study guides
- Schedule certification and authorization exams
- View transcripts of completed courses and exams

Register at techdirect.dell.

Dell Technologies Education Services

Build the IT skills required to influence the transformational outcomes of the business. Enable talent and empower teams with the right skills to lead and execute transformational strategy that drives competitive advantage. Leverage the training and certification required for real transformation.

Dell Technologies Education Services offers PowerEdge server training and certifications designed to help you achieve more from your hardware investment. The curriculum delivers the information and the practical, hands-on skills that you and your team need to confidently install, configure, manage, and troubleshoot your Dell EMC servers. To learn more or register for a class today, see LearnDell.com/Server.

Dell Technologies Consulting Services

Our expert consultants help you transform faster, and quickly achieve business outcomes for the high value workloads Dell EMC PowerEdge systems can handle.

From strategy to full-scale implementation, Dell Technologies Consulting can help you determine how to execute your IT, workforce, or application transformation.

We use prescriptive approaches and proven methodologies combined with Dell Technologies' portfolio and partner ecosystem to help you achieve real business outcomes. From multi-cloud, applications, DevOps, and infrastructure transformations, to business resiliency, data center modernization, analytics, workforce collaboration, and user experiences—we're here to help.

Dell EMC Managed Services

Reduce the cost, complexity, and risk of managing IT. Focus your resources on digital innovation and transformation while our experts help optimize your IT operations and investment with managed services backed by guaranteed service levels.

Appendix A: Additional specifications

Topics:

- Chassis dimensions
- Chassis weight
- Video specifications
- USB ports
- PSU rating
- Environmental specifications

Chassis dimensions

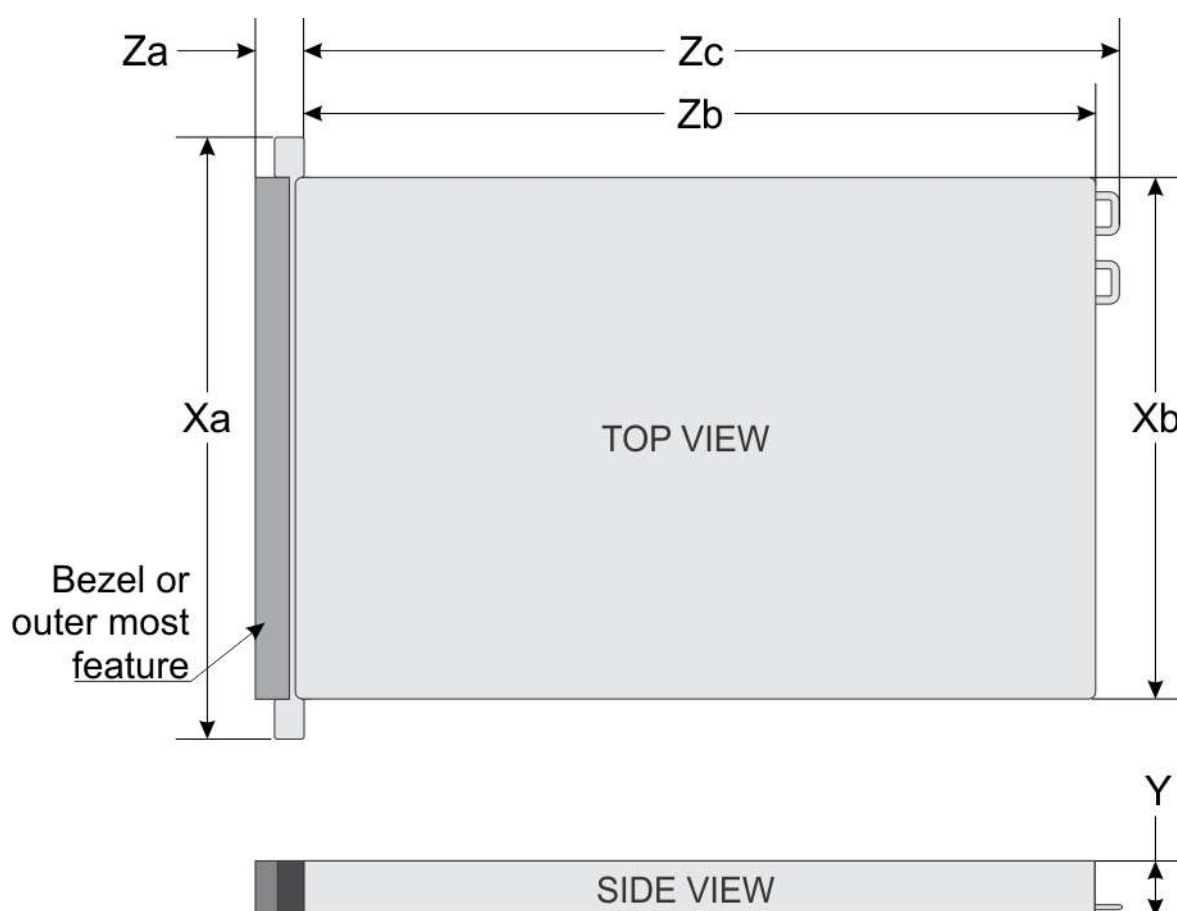


Figure 18. PowerEdge R550 chassis dimensions

Table 19. Chassis dimensions

| Drives | Xa | Xb | Y | Za | Zb | Zc |
|-----------|----------|----------|-----------------------|-----------------------|--------------------------|--------------------------|
| 16 drives | 482.0 mm | 434.0 mm | 86.8 mm (3.41 inches) | 22.0 mm (0.86 inches) | 675.04 mm (26.57 inches) | 685.78 mm (26.99 inches) |
| 8 drives | | | | Without bezel | Ear to L bracket housing | |

Table 19. Chassis dimensions (continued)

| Drives | Xa | Xb | Y | Za | Zb | Zc |
|--------|----------------|----------------|---|--------------------------------------|---|---|
| | (18.97 inches) | (17.08 inches) | | 35.84 mm (1.41 inches) With bezel | 650.24 mm (25.6 inches) Ear to PSU surface | Ear to PSU handle without velcro strap |

Chassis weight

Table 20. PowerEdge R550 system weight

| System configuration | Maximum weight (with all drives/SSDs/rails/bezel) |
|----------------------|---|
| 16 x 2.5-inch | 23.84 kg (52.55 pounds) |
| 8 x 2.5-inch | 20.44 kg (45.06 pounds) |
| 8 x 3.5-inch | 24.80 kg (54.67 pounds) |

Video specifications

The platform supports the following video resolution and refresh rates:

Table 21. Video Resolution and Refresh Rate

| Resolution | Refresh rate (Hz) | Color depth (bits) |
|-------------|-------------------|--------------------|
| 1024 x 768 | 60 | 8, 16, 32 |
| 1280 x 800 | 60 | 8, 16, 32 |
| 1280 x 1024 | 60 | 8, 16, 32 |
| 1360 x 768 | 60 | 8, 16, 32 |
| 1440 x 900 | 60 | 8, 16, 32 |
| 1600 x 900 | 60 | 8, 16, 32 |
| 1600 x 1200 | 60 | 8, 16, 32 |
| 1680 x 1050 | 60 | 8, 16, 32 |
| 1920 x 1080 | 60 | 8, 16, 32 |
| 1920 x 1200 | 60 | 8, 16, 32 |

*DVO - DP is for investigation only, dependent on Nuvoton DVO capabilities to support up to 165 MHz. Rear Panel Performance is TBD subject to final board design and losses to rear VGA connector

*(RB) - Reduced Blanking for Digital Displays requiring less blank time. This was introduced for Signal Integrity improvements by reducing Pixel Clock rates for VGA- Analog input devices.

USB ports

All USB ports follow USB specifications.

USB 2.0 and USB 3.0 ports support maximum output current of 0.5 A and 0.9 A, respectively.

The ports cannot support high power consumption devices such as CD-ROM on the rear USB port of the rear I/O board and on the right control panel USB 2.0 port.

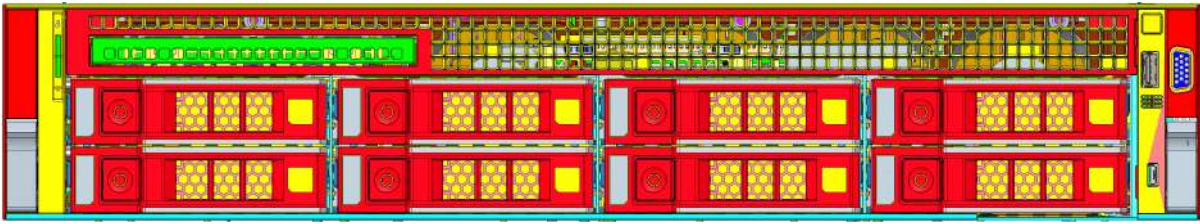


Figure 19. Front USB 2.0 port

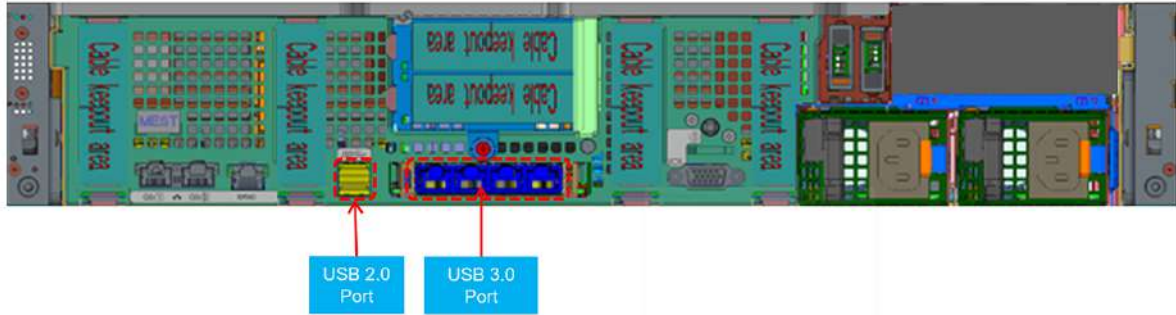


Figure 20. Rear USB 3.0 port (bottom) and USB 2.0 port (top)

Internal USB

The size of the internal USB card dongle is 40 x 16 x 8 mm (L x W x H).

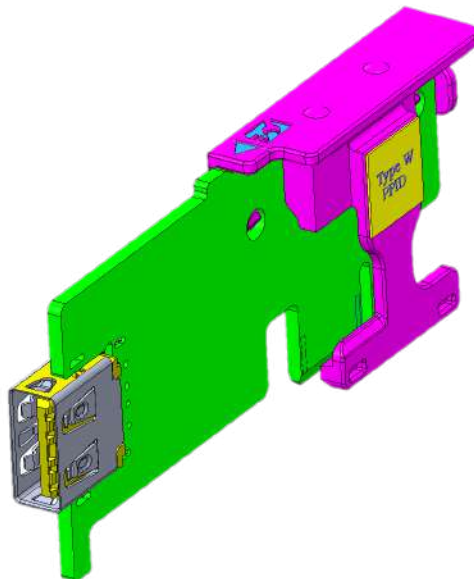


Figure 21. Rear USB

PSU rating

Table 22. PSUs Highline and Lowline ratings

| | 600 W Platinum | 700 W Titanium | 800 W Platinum | DC 1100 W | 1100 W Titanium | 1800 W Titanium |
|------------------|----------------|----------------|----------------|-----------|-----------------|-----------------|
| Highline/-72 VDC | 600 W | 700 W | 800 W | 1100 W | 1100 W | 1800 W |

Table 22. PSUs Highline and Lowline ratings (continued)

| | 600 W Platinum | 700 W Titanium | 800 W Platinum | DC 1100 W | 1100 W Titanium | 1800 W Titanium |
|----------------------|-----------------------|-----------------------|-----------------------|------------------|------------------------|------------------------|
| Lowline/-40 VDC | 600 W | N/A | 800 W | 1100 W | 1050 W | N/A |
| Highline 240 VDC | 600 W | 700 W | 800 W | N/A | 1100 W | 1800 W |
| Highline 200-380 VDC | N/A | N/A | N/A | N/A | N/A | N/A |
| DC -48-60 V | N/A | N/A | N/A | 1100 W | N/A | N/A |

The PowerEdge R550 supports up to 2 AC or DC power supplies with 1+1 redundancy, autosensing and auto-switching capability.

If two PSUs are present during POST, a comparison is made between the wattage capacities of the PSUs. In the event that the PSU wattages don't match, the larger of the two PSU's is enabled. Also, there is a PSU mismatch warning displayed in BIOS, iDRAC or on the System LCD.

If a second PSU is added at run-time, in order for that particular PSU to be enabled, the wattage capacity of the first PSU must equal the second PSU. Otherwise, the PSU will be flagged as unmatched in iDRAC and the second PSU will not be enabled.

Dell PSUs have achieved Platinum efficiency levels as shown in the table below.

Table 23. PSU efficiency levels

| Efficiency Targets by Load | | | | | | |
|-----------------------------------|-------------------|--------------|------------|------------|------------|-------------|
| Form factor | Output | Class | 10% | 20% | 50% | 100% |
| Redundant 60 mm | 600 W AC | Platinum | N/A | 92.00% | 94.00% | 90.00% |
| | 700 W Mixed Mode | Titanium | 90.00% | 94.00% | 96.00% | 91.00% |
| | 800 W AC | Platinum | N/A | 92.00% | 94.00% | 90.00% |
| | 1100 W Mixed Mode | Titanium | 90.00% | 94.00% | 96.00% | 91.00% |
| | 1100 W -48V | N/A | N/A | N/A | N/A | N/A |
| | 1400 W Mixed Mode | Platinum | N/A | 92.00% | 94.00% | 90.00% |

Environmental specifications

The table below details the environmental specifications for the platform. For additional information about environmental measurements for specific system configurations, see <https://www.dell.com/learn/us/en/uscorp1/product-info-datasheets-safety-emc-environmental>.

An important feature of having a broad menu of different categories is to allow the same platform model to have different operational ranges depending on the MRD defined.

A list of range categories for different configurations shall be identified by thermal team as early in the project as possible. Post release, see the Dell EMC PowerEdge Technical Specifications at https://www.dell.com/support/home/en-in//products/server_int/server_int_poweredge.

Table 24. Operational Climatic Range Categories

| Category A2 | Allowable Operation |
|--|---|
| Temperature Ranges (For Altitude <900 meters or 2953 feet) | 10 to 35°C (50 to 95°F) with no direct sunlight on the platform |

Table 24. Operational Climatic Range Categories (continued)

| Category A2 | Allowable Operation |
|---|---|
| Humidity Percent Ranges (Non-Condensing at all times) | 8%RH with -12°C minimum dew point to 80%RH with 21°C (69.8°F) maximum dew point |
| Operational Altitude De-Rating | Maximum temperature is reduced by 1°C/300 meters (1.8°F/984 feet) above 900 meters (2,953 feet) |

Table 25. Operational Climatic Range Categories

| Category A3 | Allowable Operation |
|--|--|
| Temperature Ranges (For Altitude <900 meters or 2953 feet) | 5 to 40°C (41 to 104°F) with no direct sunlight on the platform |
| Humidity Percent Ranges (Non-Condensing at all times) | 8%RH with -12°C minimum dew point to 85%RH with 24°C (75.2°F) maximum dew point |
| Operational Altitude De-Rating | Maximum temperature is reduced by 1°C/175meters (1.8°F/574 feet) above 900 meters (2,953 feet) |

Table 26. Operational Climatic Range Categories

| Category A4 | Allowable Operation |
|--|---|
| Temperature Ranges (For Altitude <900 meters or 2953 feet) | 5 to 45°C (41 to 113°F) with no direct sunlight on the platform |
| Humidity Percent Ranges (Non-Condensing at all times) | 8%RH with -12°C minimum dew point to 90%RH with 24°C (75.2°F) maximum dew point |
| Operational Altitude De-Rating | Maximum temperature is reduced by 1°C/125 meters (1.8°F/410 feet) above 900 meters (2,953 feet) |

The table below shows the requirements shared across all environmental categories:

Table 27. Shared Requirements

| Allowable Operation | |
|--|--|
| Maximum Temperature Gradient (applies to both operation and non-operation) | 20°C in an hour* (36°F in an hour) and 5°C in 15 minutes (9°F in 15 minutes), 5°C in an hour* (9°F in an hour) for tape hardware |
| Non-Operational Temperature Limits | -40 to 65°C (-40 to 149°F) |
| Non-Operational Humidity Limits (Non-Condensing at all times) | 5% to 95%RH with 27°C (80.6°F) maximum dew point |
| Maximum Non-Operational Altitude | 12,000 meters (39,370 feet) |
| Maximum Operational Altitude | 3,048 meters (10,000 feet) |

Table 28. Maximum vibration specifications

| Maximum vibration | Specifications |
|-------------------|--|
| Operating | 0.26Grms at 5Hz to 350Hz (x, y, and z axes) |
| Storage | 1.88Grms at 10Hz to 500Hz for 15min (all six sides tested) |

Table 29. Maximum shock specifications

| Maximum vibration | Specifications |
|-------------------|--|
| Operating | Six consecutively executed shock pulses in the positive and negative x, y, and z axes of 6G for up to 11ms |

Table 29. Maximum shock specifications (continued)

| Maximum vibration | Specifications |
|-------------------|---|
| Storage | Six consecutively executed shock pulses in the positive and negative x, y, and z axes (one pulse on each side of the system) of 71 G for up to 2 ms |

Thermal restrictions

Thermal management of the platform helps deliver high performance with the right amount of cooling to components, while maintaining the lowest fan speeds possible.

This is done across a wide range of ambient temperatures from 10°C to 35°C (50°F to 95°F)

R550 must follow the thermal restriction below.

Table 30. Thermal restriction System configuration

| | | 8 x 3.5-inch | 16 x 2.5-inch SAS | 8 x 2.5-inch |
|-------------------------|-------|---------------------------|---------------------------|---------------------------|
| LFM | | 131.2 | 146.8 | 189.9 |
| Rear Config | | 6 LP Configuration | 6 LP Configuration | 6 LP Configuration |
| With OCP shroud | | N/A | N/A | N/A |
| With Rear Drives | | No | No | No |
| Boss mode | | Yes | Yes | Yes |
| Processor TDP | 105 W | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK |
| | 120 W | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK |
| | 125 W | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK |
| | 135 W | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK |
| | 150 W | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK | STD Fan x 5 STD HSK |
| | 165 W | STD Fan x 5 HPR HSK | STD Fan x 5 HPR HSK | STD Fan x 5 HPR HSK |
| | 185 W | STD Fan x 5 HPR HSK | STD Fan x 5 HPR HSK | STD Fan x 5 HPR HSK |
| | 205 W | STD Fan x 5 HPR HSK | STD Fan x 5 HPR HSK | STD Fan x 5 HPR HSK |
| | 220 W | STD Fan x 5 HPR HSK | STD Fan x 5 HPR HSK | STD Fan x 5 HPR HSK |
| With DMM blank | | No | No | No |
| OCP | | Yes | Yes | Yes |

Table 30. Thermal restriction System configuration (continued)

| | 8 x 3.5-inch | 16 x 2.5-inch SAS | 8 x 2.5-inch |
|-------------------------|---|---|---|
| LFM | 131.2 | 146.8 | 189.9 |
| Rear Config | 6 LP Configuration | 6 LP Configuration | 6 LP Configuration |
| With OCP shroud | N/A | N/A | N/A |
| With Rear Drives | No | No | No |
| Boss mode | Yes | Yes | Yes |
| PCIe and OCP optic | Cx6 with active optics supports slot 1,2,3,6 only | Cx6 with active optics supports slot 1,2,3,6 only | Cx6 with active optics supports slot 1,2,3,6 only |
| PCIe cooling | | | |
| ASHARE A3/A4 | Refer to restriction requirement | Refer to restriction requirement | Refer to restriction requirement |
| Fan count | 5 | 5 | 5 |

Cooling components thermal restrictions

Table 31. Thermal restrictions

| Configurations | | Processor | Fan Type/ Q'ty | HSK Type | Air Shroud | OCP Shroud | DIMM Blank | Process or Blank |
|-------------------------|----------------------------|-----------------|----------------|----------|------------|------------|------------|------------------|
| | Rear Configuration | SKU | | | | | | |
| 8 x 3.5-inch SAS/ SATA | 1 x OCP, 6 x LP With Riser | < =150 W | 5 x STD Fan | STD HSK | Yes | No | Yes | N/A |
| | | >150 W < =220 W | | HPR HSK | | | | |
| 16 x 2.5-inch SAS/ SATA | 1 x OCP, 4 x LP W/O Riser* | < =150 W | 5 x STD Fan | STD HSK | Yes | Yes | No | N/A |
| | | >150 W < =220 W | | HPR HSK | | | | |
| | 1 x OCP, 6 x LP With Riser | < =150 W | | STD HSK | | No | | |
| | | >150 W < =220 W | | HPR HSK | | | | |
| 8 x 2.5-inch SAS/ SATA | 1 x OCP, 6 x LP With Riser | < =150 W | 5 x STD Fan | STD HSK | Yes | No | No | N/A |
| | | >150 W < =220 W | | HPR HSK | | | | |

NOTE: OCP shroud is required without riser module installed.

NOTE: Processor blank is required for 1P configuration.

Appendix B. Standards compliance

The system conforms to the following industry standards.

Table 32. Industry standard documents

| Standard | URL for information and specifications |
|--|---|
| ACPI Advance Configuration and Power Interface Specification, v2.0c | https://uefi.org/specsandtesttools |
| Ethernet IEEE 802.3-2005 | https://standards.ieee.org/ |
| HDG Hardware Design Guide Version 3.0 for Microsoft Windows Server | microsoft.com/whdc/system/platform/pcdesign/desguide/serverdg.mspx |
| IPMI Intelligent Platform Management Interface, v2.0 | intel.com/design/servers/ipmi |
| DDR4 Memory DDR4 SDRAM Specification | jedec.org/standards-documents/docs/jesd79-4.pdf |
| PCI Express PCI Express Base Specification Rev. 2.0 and 3.0 | pcisig.com/specifications/pciexpress |
| PMBus Power System Management Protocol Specification, v1.2 | http://pmbus.org/Assets/PDFS/Public/PMBus_Specification_Part_1_Rev_1-1_20070205.pdf |
| SAS Serial Attached SCSI, v1.1 | http://www.t10.org/ |
| SATA Serial ATA Rev. 2.6; SATA II, SATA 1.0a Extensions, Rev. 1.2 | sata-io.org |
| SMBIOS System Management BIOS Reference Specification, v2.7 | dmtf.org/standards/smbios |
| TPM Trusted Platform Module Specification, v1.2 and v2.0 | trustedcomputinggroup.org |
| UEFI Unified Extensible Firmware Interface Specification, v2.1 | uefi.org/specifications |
| USB Universal Serial Bus Specification, Rev. 2.0 | usb.org/developers/docs |

Appendix C Additional resources

Table 33. Additional resources

| Resource | Description of contents | Location |
|--------------------------------------|---|--|
| Installation and Service Manual | This manual, available in PDF format, provides the following information: <ul style="list-style-type: none"> • Chassis features • System Setup program • System indicator codes • System BIOS • Remove and replace procedures • Diagnostics • Jumpers and connectors | Dell.com/Support/Manuals |
| Getting Started Guide | This guide ships with the system, and is also available in PDF format. This guide provides the following information: <ul style="list-style-type: none"> • Initial setup steps | Dell.com/Support/Manuals |
| Rack Installation Guide | This document ships with the rack kits, and provides instructions for installing a server in a rack. | Dell.com/Support/Manuals |
| System Information Label | The system information label documents the system board layout and system jumper settings. Text is minimized due to space limitations and translation considerations. The label size is standardized across platforms. | Inside the system chassis cover |
| Quick Resource Locator (QRL) | This code on the chassis can be scanned by a phone application to access additional information and resources for the server, including videos, reference materials, service tag information, and Dell EMC contact information. | Inside the system chassis cover |
| Energy Smart Solution Advisor (ESSA) | The Dell EMC online ESSA enables easier and more meaningful estimates to help you determine the most efficient configuration possible. Use ESSA to calculate the power consumption of your hardware, power infrastructure, and storage. | Dell.com/calc |